

## Product Features

- PI74ALVC16334 is designed for low voltage operation,  $V_{CC}=2.3V$  to  $3.6V$
- Supports PC100 Registered DIMM
- Typical VOLP (Output Ground Bounce)  $<0.8V$  at  $V_{CC}=3.3V$ ,  $T_A=25^{\circ}C$
- Typical VOHV (Output VOH Undershoot)  $<2.0V$  at  $V_{CC}=3.3V$ ,  $T_A=25^{\circ}C$
- Industrial operation at  $-40^{\circ}C$  to  $+85^{\circ}C$
- Packages available:
  - 48-pin 240 mil wide plastic TSSOP (A)
  - 48-pin 173 mil wide plastic TSVSOP (K)
  - 48-pin 300 mil wide plastic SSOP (V)

## Product Description


Pericom Semiconductor's PI74ALVC series of logic circuits are produced in the Company's advanced 0.5 micron CMOS technology, achieving industry leading speed.

The 16-bit PI74ALVC16334 universal bus driver is designed for 2.3V to 3.6V Vcc operation.

Data flow from A to Y is controlled by Output Enable ( $\overline{OE}$ ). The device operates in the transparent mode when  $\overline{LE}$  is LOW. When  $\overline{LE}$  is HIGH, the A data is latched if CLK is held at a high or low logic level. If  $\overline{LE}$  is HIGH, the A-data is stored in the latch/flip-flop on the low-to-high transition of CLK. When  $\overline{OE}$  is HIGH, the outputs are in the high-impedance state.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

## Logic Block Diagram

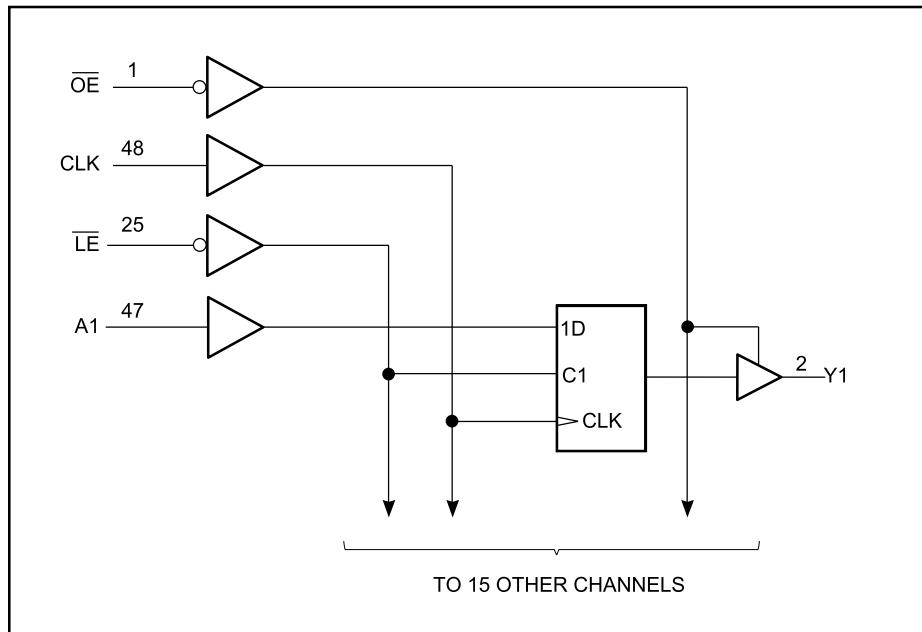


### Product Pin Description

Pin Name	Description
$\overline{OE}$	Output Enable Input (Active LOW)
$\overline{LE}$	Latch Enable (Active LOW)
CLK	Clock Input
A	Data Input
Y	Data Output
GND	Ground
VCC	Power

### Truth Table<sup>(1)†</sup>

Inputs				Outputs <b>Y</b>
$\overline{OE}$	$\overline{LE}$	CLK	A	
H	X	X	X	Z
L	L	X	L	L
L	L	X	H	H
L	H	$\uparrow$	L	L
L	H	$\uparrow$	H	H
L	H	L or H	X	Yo <sup>(2)</sup>

### Product Pin Configuration

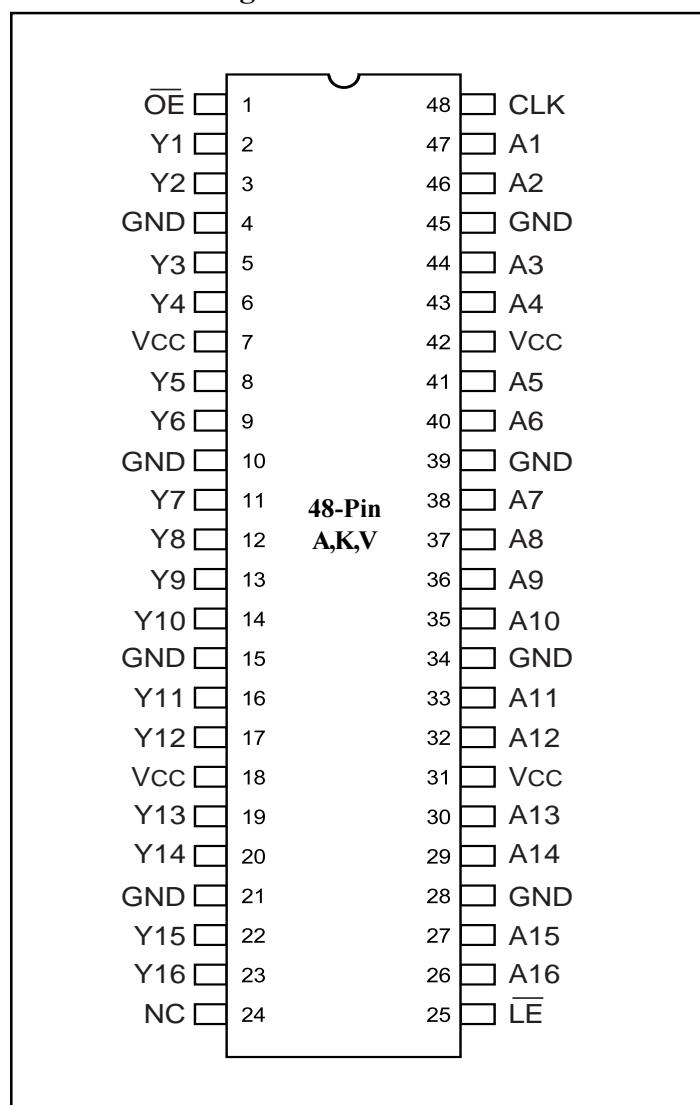

#### Note:

- 1 H = High Signal Level  
L = Low Signal Level  
Z = High Impedance  
 $\uparrow$  = Transition LOW-to-HIGH  
X = Irrelevant
2. Output level before the indicated steady-state input conditions were established.

### Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature .....	-65°C to +150°C
Ambient Temperature with Power Applied .....	-40°C to +85°C
Input Voltage Range, VIN .....	-0.5V to V <sub>CC</sub> +0.5V
Output Voltage Range, V <sub>OUT</sub> .....	-0.5V to V <sub>CC</sub> +0.5V
DC Input Voltage .....	-0.5V to +5.0V
DC Output Current .....	100mA
Power Dissipation .....	1.0W

**Note:**

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

### Recommended Operating Conditions<sup>(1)</sup>

Parameters	Description	Test Conditions	Min.	Typ.	Max.	Units
V <sub>CC</sub>	Supply Voltage		2.3		3.6	V
V <sub>IH</sub>	Input HIGH Voltage	V <sub>CC</sub> = 2.3V to 2.7V	1.7			V
		V <sub>CC</sub> = 2.7V to 3.6V	2.0			
V <sub>IL</sub>	Input LOW Voltage	V <sub>CC</sub> = 2.3V to 2.7V			0.7	V
		V <sub>CC</sub> = 2.7V to 3.6V			0.8	
V <sub>IN</sub>	Input Voltage		0		V <sub>CC</sub>	V
V <sub>OUT</sub>	Output Voltage		0		V <sub>CC</sub>	V
I <sub>OH</sub>	High-level Output Current	V <sub>CC</sub> = 2.3V			-12	mA
		V <sub>CC</sub> = 2.7V			-12	
		V <sub>CC</sub> = 3.0V			-24	
I <sub>OL</sub>	Low-level Output Current	V <sub>CC</sub> = 2.3V			12	mA
		V <sub>CC</sub> = 2.7V			12	
		V <sub>CC</sub> = 3.0V			24	
T <sub>A</sub>	Operating Free-Air Temperature	-40			85	°C

**Note:**

- Unused control inputs must be held HIGH or LOW to prevent them from floating.



**Switching Characteristics Over Operating Range<sup>(1)</sup>**

Parameters	From (INPUT)	To (OUTPUT)	V <sub>CC</sub> = 2.5V ± 0.2V	V <sub>CC</sub> = 2.7V		V <sub>CC</sub> = 3.3 V ± 0.3V		Units
			Min. <sup>(2)</sup>	Max.	Min. <sup>(2)</sup>	Max.	Min. <sup>(2)</sup>	
f <sub>MAX</sub>			150		150		150	
t <sub>PD</sub>	A	Y	1.0	3.7		3.6	1.1	3.3
t <sub>PD</sub>	LE	Y	1.0	4.8		5.0	1.3	4.4
t <sub>PD</sub>	CLK	Y	1.0	4.4		4.5	1.0	4.1
t <sub>EN</sub>	OE	Y	1.0	5.4		5.4	1.1	4.6
t <sub>DIS</sub>	OE	Y	1.0	4.1		4.5	1.7	4.4
								ns

**Notes:**

1. See test circuit and wave forms.
2. Minimum limits are guaranteed but not tested on Propagation Delays.

**Operating Characteristics, T<sub>A</sub> = 25°C**

Parameters	Test Conditions	V <sub>CC</sub> = 2.5V ± 0.2V	V <sub>CC</sub> = 3.3V ± 0.3V	Units
		Typical	Typical	
CPD Power Dissipation Capacitance	Outputs Enabled	31	36	pF
	Outputs Disabled	7	11	